

# Static Eliminator Blowers

## High frequency type

# WINSTAT

## Static eliminator blower WINSTAT BF-SZA




An AC adapter is not provided with the BF-SZA model.

- Please purchase the dedicated AC adapter (OBF-24V-A) to enable connection to an AC power source.
- Please purchase the dedicated serial connection cable as 2 meter (OBF-SZA-CBL) for connecting BF-SZA serially.

### Main Features


- Up to eight units can be connected serially. However, only three units can be connected when the AC adapter is used.
- A louver that is simple to attach or detach has been adopted to facilitate product maintenance.

### Static elimination area

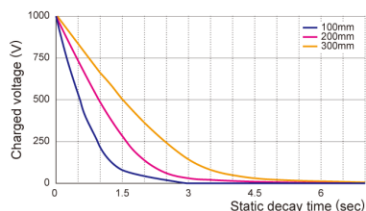

### Dimensional Diagrams

## BF-SZA

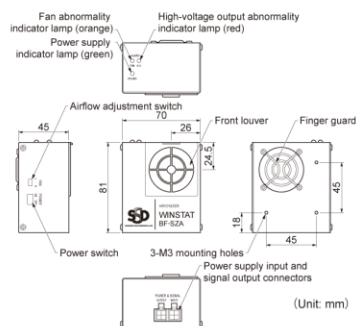

Model	BF-SZA
Input power supply	24 VDC
Capacity	8 VA
Output voltage	2.0 kVAC
Ion balance	±10 V or less
Airflow	0.27 m <sup>3</sup> /min
Ozone density	0.1 ppm or less
Operating Environment	10 to 40°C / 15 to 65% RH (no condensation)
Main unit dimensions	70×81×45 mm (W×H×D)
Weight	280 g
Noise level	33 dB (A)
Alarm functions	LED indication and signal output when the fan, high-voltage output or power supply stops